

Metal cylindrical shape inductive sensors **LR12X** series



Features

- ◆ Extended sensing distance;
- ◆ ASIC design, safe and reliable;
- ◆ Perfect choice for metallic target detection;




Part number

DC 2 wires NO	LR12XBF04DLOY-E2	LR12XBN08DLOY-E2	DC 2 wires NC	LR12XBF04DLCY-E2	LR12XBN08DLCY-E2
---------------	------------------	------------------	---------------	------------------	------------------

Technical specifications

Mounting	Quasi -flush	Non-flush	Leakage current [Ir]	≤1mA	
Rated distance [Sn]	4mm	8mm	Circuit protection	Short-circuit, overload and reverse polarity	
Assured distance [Sa]	0...3.2mm	0...6.4mm	Output indicator	Yellow LED	
Dimensions	M12*63mm	M12*71mm	Ambient temperature	-25°C...70°C	
Output	NO/NC(depends on part number)		Ambient humidity	35-95%RH	
Supply voltage	10...30 VDC		Switching frequency [F]	800 Hz	500 Hz
Standard target	Fe 12*12*1tFe 24*24*1t		Voltage withstand	1000V/AC 50/60Hz 60S	
Switch-point drifts[%/Sr]	≤ ± 10%		Insulation resistance	≥50MΩ (500VDC)	
Hysteresis range [%/Sr]	1...20%		Vibration resistance	10...50Hz (1.5mm)	
Repeat accuracy [R]	≤3%		Degree of protection	IP67	
Load current	≤100mA		Housing material	Nickel-copper alloy	
Residual voltage	≤6V		Connection type	M12 connector	

Dimensions

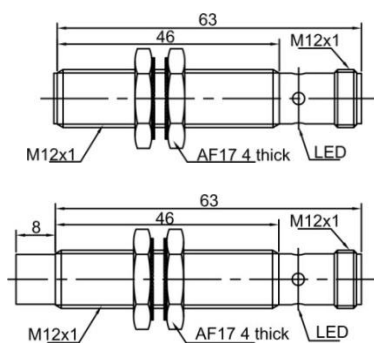

Wiring diagram

